

# MUFFLERS & COUPLINGS

### In This Section





Mufflers ..... 23.2  
 Smaller Diameter Mufflers. .... 23.2  
 Isolation Coupling..... 23.2  
 Isolation Pad ..... 23.2



**Questions? Answers at...**  
**Western US: 1-866 CED-ELEV**  
 or 1-866-233-3538 • Fax 1-562-427-8429  
**Eastern US: 1-866-253-2915**  
 or 1-860-256-2211 • Fax 1-860-290-8970

**or visit us online at**  
**[www.cedelevator.com](http://www.cedelevator.com)**  
 for 24 hour order entry,  
 cross reference data base,  
 product specifications  
 with pictures and much more!

*Full line catalog available on request*

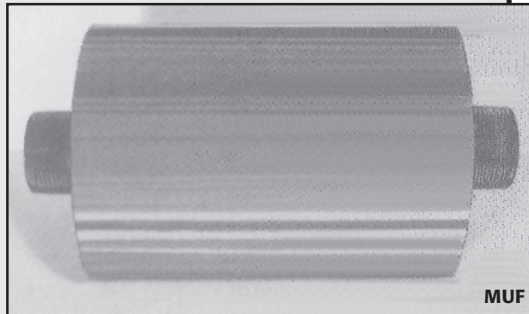

## Mufflers & Couplings

### Mufflers

Quality mufflers operate with maximum efficiency to minimize noise under all conditions. Easily installed, quality construction with maintenance-free operation.

- Dimensions: 8 $\frac{5}{8}$ "D x 18" O.A.L. Weight: 58 lbs.

Part Number	Description
MUF-2G	2" grooved
MUF-2.5G	2½" grooved
MUF-3G	3" grooved
MUF-1.5	1½" threaded
MUF-2	2" threaded
MUF-2.5	2½" threaded
MUF-3	3" threaded

### Smaller Diameter Mufflers

Lighter weight. Composed of sound deadening compound with a compression-resistant core.

Part Number	Description	Dimensions	Weight
MUFS-2G	2" grooved	4"D x 20" O.A.L.	25 lbs.
MUFS-2.5G	2½" grooved	4"D x 20" O.A.L.	25 lbs.
MUFS-3G	3" grooved	6"D x 20" O.A.L.	40 lbs.
MUFS-2	2" threaded	4"D x 20" O.A.L.	25 lbs.
MUFS-2.5	2½" threaded	4"D x 20" O.A.L.	25 lbs.
MUFS-3	3" threaded	6"D x 20" O.A.L.	40 lbs.

### Isolation Coupling

- Reduces mechanically transmitted noise between power unit and car
- Use with muffler for maximum sound reduction
- Dielectric strength of 25 KV

Part Number	Description
ISC2G	2" grooved ends
ISC2.5G	2½" grooved ends
ISC3G	3" grooved ends
ISC4G	4" grooved ends

### Isolation Pad

Part Number ISP:

- Buna "N" motor mount made for submersible power units

**Questions? Answers at...**