

# SAFETY EQUIPMENT



**Questions? Answers at...**  
**Western US: 1-866 CED-ELEV**  
*or 1-866-233-3538 • Fax 1-562-427-8429*  
**Eastern US: 1-866-253-2915**  
*or 1-860-256-2211 • Fax 1-860-290-8970*

**or visit us online at**  
**[www.cedelevator.com](http://www.cedelevator.com)**  
*for 24 hour order entry,  
 cross reference data base,  
 product specifications  
 with pictures and much more!*


*Full line catalog available on request*

## In this Section

- Field Employees' Safety Handbook . . . . . 28.2
- Safety Mirrors . . . . . 28.2
- Safety Glasses & Gloves . . . . . 28.2
- GFCI Devices . . . . . 28.3
- Lockout/Tagout Devices . . . . . 28.3
- Square Mesh Wire Cloth . . . . . 28.4
- PearlWeave Hoistway Safety Netting . . . . . 28.4
- Hoistway Guard Systems . . . . . 28.4
- Pedestrian Barricades . . . . . 28.5
- Counterweight Derailment System . . . . . 28.6
- Seismic Switch . . . . . 28.6



MEL99

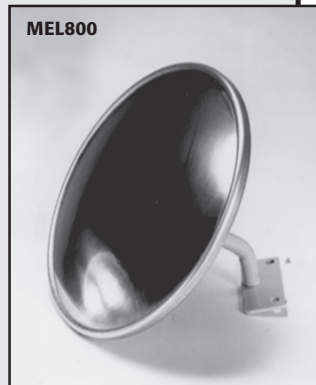

MEL800



## Safety Handbook, Mirrors Glasses & Gloves

### Field Employees' Safety Handbook

- 146-page, loose-leaf style
  - User-friendly format
  - Improved illustrations
  - Heavy-duty, poly-vinyl yellow binder
- Part Number **ELEVESH**

### Safety Mirrors

- Meet state law requirements
- High polished stainless metal mirror finish
- Unbreakable design
- Easy to maintain
- Tamper-proof installation
- Mounting hardware included

Part Number	Description
<b>MEL99</b>	10" triangular, secured from outside of cab bracket with set screw.
<b>MEL800</b>	8" round, quick, easy surface mounting with metal rod.

### Safety Glasses

Flanker—Clear, Smoke  
Sectorlite—Yellow, Mirror, Clear, Smoke  
Strobe—Clear, Smoke

### Safety Gloves

Available in small, medium, large, x-large and xx-large. Various colors available.  
Models: Framed Cut Finger; Grunt; Handler; Palmer; Tacker.

**Questions? Answers at...**

28.2

Western US: 866 CED-ELEV Eastern US: 866-253-2915  
or 866-233-3538 • Fax 562-427-8429 or 860-256-2211 • Fax 860-290-8970

# GFCI Devices Cords, Lights, Boxes & Lockout/Tagout Devices

## In-line GFCI

Great for use in wet areas and construction site applications, this In-Line Cord is available in either 120V/15A, 14/3 AWG or 240V/20A, 12/3 AWG. Extension cord length varies from 1', 6', 25' and 50'. If there's a trip or power outage, manual reset is required, thus preventing unmonitored equipment start up.

## GFCI Trouble Light

Perfect for industrial uses where light and electrical safety are necessary. Protected by an all metal housing and includes one extra NEMA 5-15 convenience receptacle at the light end. A 25' extension cord is attached.

## GFCI Cord, 6ft.



Everyone who uses an electric tool needs to ensure his own electrical protection! This 6-foot outdoor cord has a 15 amp. GFCI built into the male plug, with a test/reset button included. The other end has a molded-on POWERLITE power indicator plug that illuminates to show that the power is on. Meets or exceeds UL, OSHA or NEMA specifications.

## GFCI Protected Quad Box

This 20 amp quad box is built to protect both pairs of receptacles. Its special features include T-slotted receptacles to allow both 15 and 20 ampere rated tools, with either NEMA 5-15 or NEMA 5-20 plugs. The second feature includes a "fast breaker" which is built into the heavy resistant box. This is great for fast reset should a power overload occur. Available in both 25' and 50' lengths.

## Lockout/Tagout Devices

Part Number	Description
IDEAL44785	Cleat for 277V Breaker Lockout
IDEAL44786	480/600V Lockout
IDEAL44789	Wall Switch Lockout
IDEAL44807	480/600V Multi-Pole Breaker Lockout
IDEAL44809	Universal 277V SP Breaker Lockout
IDEAL44810	Hinged 1-Pole Breaker Lockout
CSRK436	Combination Padlock
PANPSL1	Padlock Hasp, 1" Jaw w/Overlapping Tabs
ED602	Padlock Hasp, 1" Jaw without Tabs
PANPVT57Q	Lockout Tag "Locked to protect workman repairing machinery." 25pk

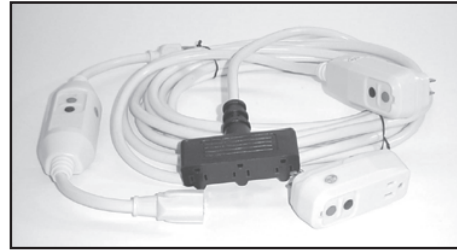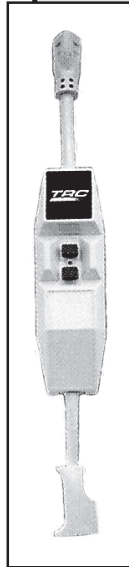

## Tri-Tap GFCI Cords & GFCI Receptacle Adapters

Part Number	Description
TOW30334304	25ft. Tri-tap GFCI Cord
TOW30334305	50ft. Tri-tap GFCI Cord
TOW30339005	GFCI Receptacle Adapter
TOW30338018	2ft. GFCI Cord
TOW30338022	6ft. GFCI Cord



Questions? Answers at...

Western US: 866 CED-ELEV Eastern US: 866-253-2915  
or 866-233-3538 • Fax 562-427-8429 or 860-256-2211 • Fax 860-290-8970

### Barclays California Code of Regulations

(applies to 1970–August 8, 1997)


#### 2.(c) Guarding of Counterweights in a Multiple-Elevator Hoistway

(1) Where counterweights are located between elevators in a hoistway having more than one elevator, the counterweight shall be guarded for the entire height of the hoistway. The guard shall extend at least 6 inches horizontally beyond each counterweight rail. The guard shall be made from wire-mesh material equal to or stronger than .048-inch diameter wire with openings not exceeding ½-inch, securely fastened to keep the guard taut and plumb.

(2) The guarding of counterweights required in Section 3013(c)(1) shall be accomplished within three years of the effective date of this regulation.  
(Title 24, Part 7, Section 7–3013.)

**OHSA Regulations** require the installation of screening between adjacent elevator hoistways to protect workers from injury.

**The National Elevator Industry's Field Employee Safety Handbook**, Section 8.3, "Hoistway Screening," requires that, "When an elevator is operating in a multiple hoistway, and construction or modernization work is to be performed, in an adjacent position of that multiple hoistway, that portion of the elevator hoistway where the work is to be performed, shall be fully separated."

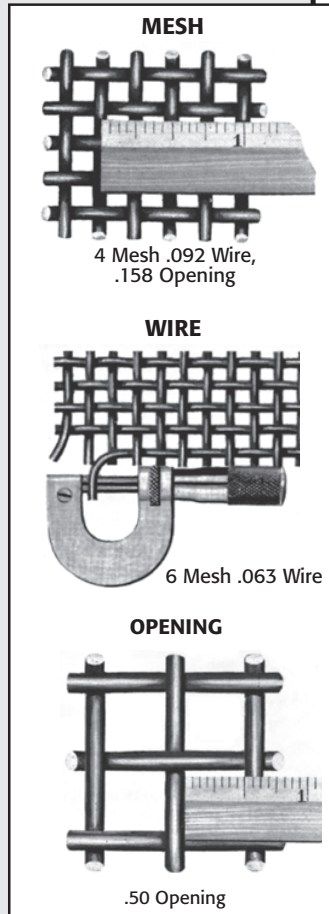

## Hoistway Safety Netting & Guard System

### Square Mesh Wire Cloth

- Galvanized, Hot-Dipped after Welded
- Mesh: ½" x ½" (center to center)
- .063" diameter wire
- Rolls are 100 feet long and are available in widths of 18, 24, 30, 36, 48, 60 and 72 inches.

#### Specifications

##### Mesh

Number of openings per lineal inch. Measured from the center of wires. The number of openings precedes the word "Mesh."

##### Wire

The diameter of wire (in decimals) used in weaving cloth.

##### Opening

The size of clear opening between parallel wires. For a given mesh, the space is determined by the diameter of wire used.

### PearlWeave Hoistway Safety Netting

PearlWeave netting, when installed vertically inside elevator hoistways, provides protection equivalent to that of wire mesh. It replaces screening behind traveling cables, protects counterweight frames, and most important, protects workers working inside of one hoistway from straying into the adjacent hoistway or the area between counterweight rails, thereby preventing serious injury, and even loss of life.

PearlWeave safety netting products are lightweight, durable and easier to use than traditional wire meshes, while exceeding their strength characteristics. Our chemical- and mildew-resistant products, are also flame retardant, and if burned, will not emit toxins into the hoistway.

Available in 48in. x 150ft. rolls

### Hoistway Guard Systems

Hoistway guard systems are used to prevent round and flat traveling cable from striking obstructions in the hoistway and from crossing over into adjoining hoistways. Their use may extend the life span and prevent possible interference of your installed elevator cables.

Our guarding systems are available in two sizes, each containing 100ft x 1.5ft of ½"x ½" wire mesh, installation hardware, and detailed installation instructions.

Part Number	Description
HGS	Hardware, mesh and base mounting kit
HGS-EXT	Hardware, mesh and extension mounting kit (used to extend HGS an additional 100ft)

### Questions? Answers at...

**28.4** Western US: 866 CED-ELEV Eastern US: 866-253-2915  
 or 866-233-3538 • Fax 562-427-8429 or 860-256-2211 • Fax 860-290-8970

# Pedestrian Barricades

## Pedestrian Barricade

The Pedestrian Barricade consists of 3 panels of 36" x 39" and is easily assembled with snap on hinges. It easily protects all pedestrians from open holes or hazardous work. The Pedestrian Barricade forms a complete barrier to protect against unnecessary pedestrian accidents. The continuous bottom "tapping" rail helps blind pedestrians stay away from work area. This barrier is considered a Type I and Type II, meeting all OSHA requirements. One vertical "CAUTION!" sign included.

NOTE: Company logo may be added at additional cost.

Part Number **AG3-ESK**



## Yellow Plywood Barricade

This barricade is constructed of four 1/4" plywood panels. Painted yellow and black with "Do Not Enter" symbol silk-screened on each panel. Overall dimensions are 42"h x 108"l.

Part Number **15-305**



## Fabric E-Z Hook Barricade



This barricade is constructed of metal tubular framing and yellow vinyl/cloth barrier. "Do Not Enter" symbol silk-screened on each of four panels. Plastic plate at bottom serves as a toe guard and multiple units can be attached to one another for larger areas. Overall dimensions are 42"h x 140"l. Plastic plate at bottom serves to increase stability and as a toe guard. Overall dimensions are 39"h x 115"l.

Part Number **15-306**



**Questions? Answers at...**

**Western US: 866-CED-ELEV Eastern US: 866-253-2915**  
or 866-233-3538 • Fax 562-427-8429 or 860-256-2211 • Fax 860-290-8970

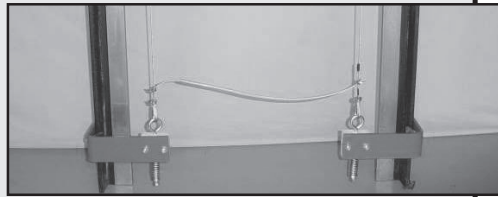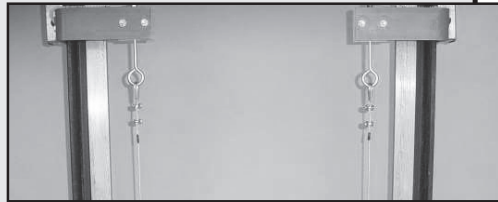

## Counterweight Derailment System Seismic Switch

### Load Tech Devices Counterweight Derailment System

System designed for quick, easy installation.

- Dual string system provides complete protection
- Factory assembled to reduce field installation time
- Heavy-duty construction suitable for high-rise as well as low-rise installation

Part Number **CDS01**

### Seismic Switch

The introduction of new solid-state accelerometers has made possible the development of a more robust and stable Seismic Switch for protection and control of elevators during earthquakes.

- Can be installed in minutes inside the elevator controller or enclosure
- Small footprint
- Dry contact output, controller area network port and RS232 port
- Designed specifically to conform to A.S.M.E. A17.1
- Runs up to 16 hours on optional backup battery
- Backup battery connector included
- Optional backup battery can be obtained at any battery supply store (any 12-volt, sealed lead acid, 1.2-1.4 Amp/Hour battery).
- Fail-Safe

Part Number **SS04**

**Questions? Answers at...**